


ASSEMBLY INSTRUCTIONS

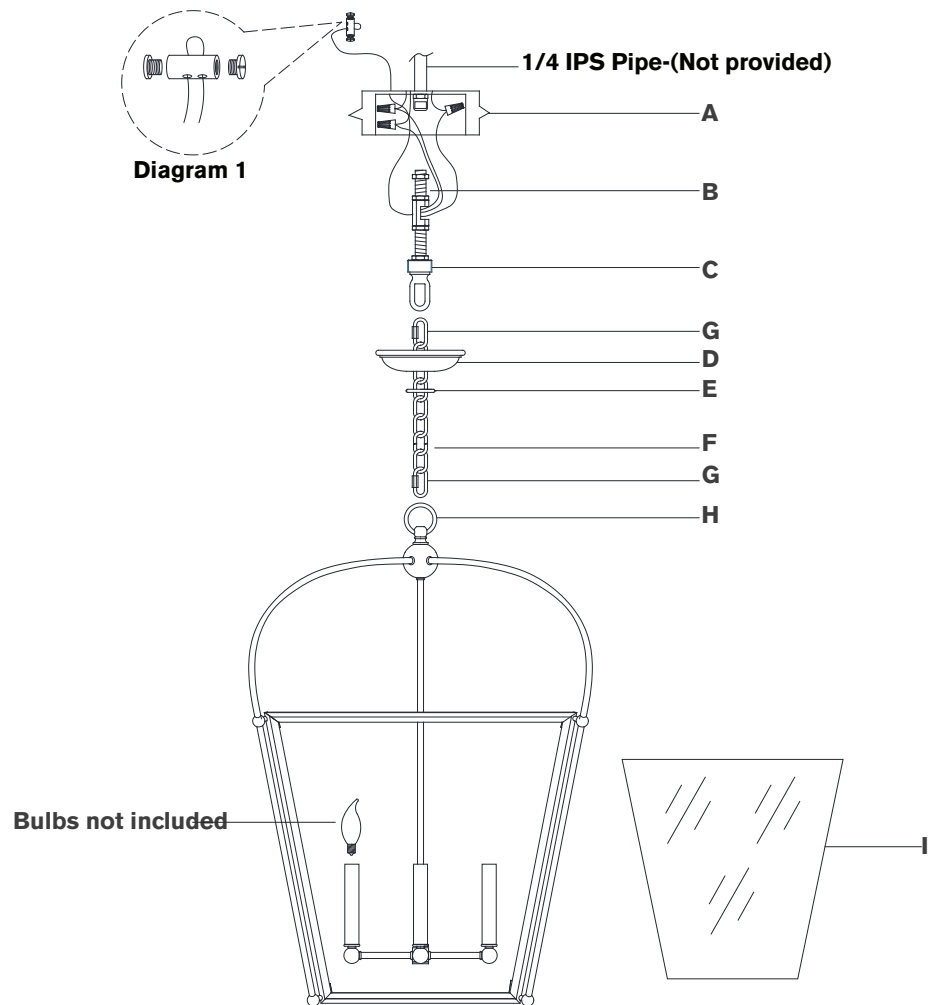

Plantation Medium Lantern

Item # CHC 3439

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building (not included). Then install threaded nipple (B) into receiver and tighten with wrench.
NOTE: Item must be supported independent of the junction box due to hanging weight.
3. Remove lock collar (C) from chain (F) and secure to threaded receiver attached to structural member by tightening locknut.
4. Install canopy (D) to collar loop (C) and secure with collar ring (E).
5. Install glass panels (I) to fixture body and secure by bending metal tabs.
6. Install light bulbs into the sockets.
7. Determine desired overall length, and amount of chain (F) needed. Shorten chain using chain pliers. (Keep extra chain)
8. Attach chain (F) to collar loop (C) and fixture loop (H) using quick links (G). Secure quick links (G).
9. Thread fixture wire and ground wire through chain (F).
NOTE: When you reach the collar loop (C), ensure there is no tension on the wires. Cut excess wires, being sure to leave about **12"** to reach the junction box.
10. Separate two sides of molded wire, and strip insulation on each 5/8".

